H-FRAME

Before beginning, read the instructions below and follow all local plumbing and building codes.


For this installation of your new water line it is presumed that the water supply lines are underneath the floor and are in direct access for faucet installation.

A rounded hole, 1-1/2" in diameter, will provide access to the water supply lines when mounting the faucet.

SHUT OFF ALL WATER SUPPLY LINES AT THE TUB WHEN INSTALLING NEW WATER LINES

Unpack and inspect your new water lines for any shipping damages and ensure no pieces are missing.

If any damages are discovered DO NOT INSTALL and contact custumer service at 877-795-5684. You may also call our customer service for any other assistance with our products.

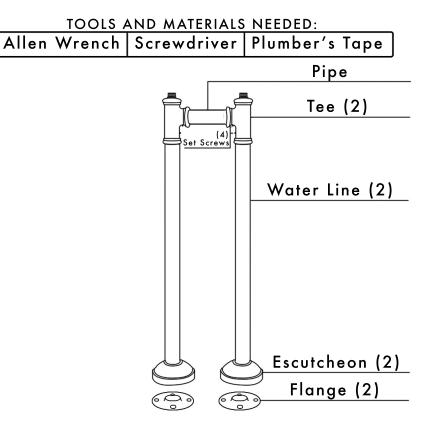

It is always advised to place plumber's tape on all threaded areas.


1. Start by threading the flange onto the bottom of the water line. Connect the hose at the bottom of the water line to the water supply in the floor. Be sure you are connecting the hot/cold lines to the correct supply line.

2. Center the water line and flange over the water supply in the floor. Secure the flange with four screws provided. Slide an escutcheon down the water line to cover the flange. Do STEPS 1 and 2 for the remaining water line before continuing.

3. Connect both tees with the pipe by loosening the set screws and placing the ends of each pipe in the tees sides and tighten the fitting on the tee to secure the pipe. Now place the tees down over the water lines until the threads of the water lines are sticking out of the top of the tees.

4. Once the tees are set, tighten the set screws at all 4 locations to secure. Tighten the fitting on the bottom of each tee as well.

5. The water lines are now set to have a faucet attached. Be sure to level and ensure your water lines are fully secure before installing your faucet.

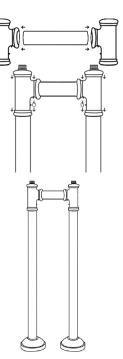

Affordable Elegance

CONTACT US: TheTubConnection.com TOLL FREE: 877-795-5684 Sales@TheTubConnection.com